

TSV2-08-2NCSPL 二位三通电磁阀 双向止回型



二位, 三通, 常闭型座阀式电磁阀 A solenoid operated, 2-way,2-position, normally closed,poppet-type bi-directional cartridge valve.

工作原理 OPERATION

失电时, 此阀截止油液双向流动; 得电时, ②到①, ①到②互通。

When de-energized, the valve blocks flow in both directions. When energized, the poppet shifts to allow flow in both directions.

手控应急 OPERATION OF MANUAL OVERRIDE OPTION

请用工具按下并按住按钮, ②到①, ①到②互通; 松开按钮, 返回常态。

To override, push button in to activate. To return to normal valve function, release button.

技术参数 SPECIFICATIONS

工作压力(Operating Pressure): 207bar

流量(Flow): 查看压力-流量曲线See PRESSURE DROP VS.FLOW graph

内泄漏(Internal Leakage): <1 drops/min.(滴/分)Our ideal leakage:

<0.05 drops/min

温度(Temperature): -40°C → +100°C

线圈额定负载(Coil Duty Rating): Continuous from 85% to 115% of nominal voltage(连续工作电压)

油液(Fluids): Mineral-based fluids with viscosities of 7.4 to 420 cSt.


(矿物油粘度)

插孔(Cavity): 08-2


阀块材料(Body Material):

6061-T6铝,允许使用最大压力207bar, 钢材允许使用最大压力350bar

6061-T6 aluminum alloy rated to 207bar, Steel & Ductile iron rated to 350bar

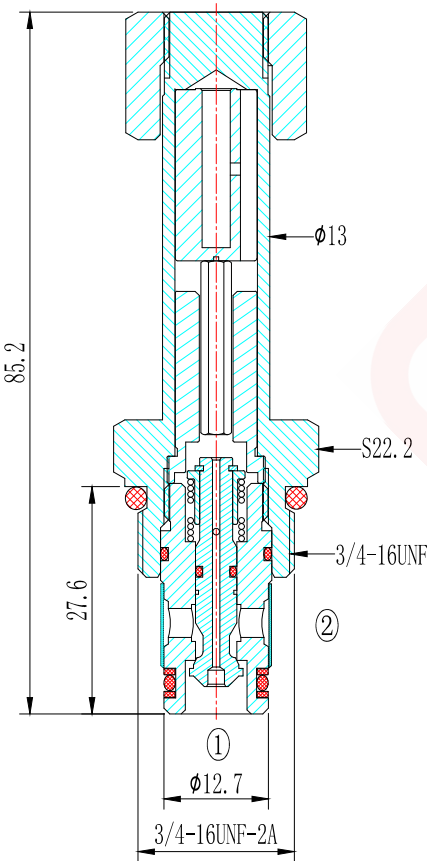

TSV2-08-2NCSPL-**-**-**-**



1.功能 Function: TSV2= 电磁阀Solenoid Valve

2.规格Size: 08=08 规格

3. 流道类型Flow Path

2=三通

4. 模式 Model

NC= 常闭Normally Closed

5.类型 Type

SP= 锥阀型Poppet

6.手控应急 Manual emergency

空白Blank= 无手控应急None ; M= 手控应急Manual Override

7.线圈连接Coil Connection

D= Double Lead 双线

S= Single Lead 单线

H= Hirschmann 三插

8.电压Voltage

12=12 VDC ; 24=24 VDC ; 110=110 VAC ; 220=220 VAC

9.阀块油口Body Porting:

空白 Blank= 不带阀块None ; 4T=SAE4 ; 6T=SAE6 ; 2G=G1/4 ; 3G=G3/8

其它螺纹油口也是可选择的 Other Porting is Available

压力 - 流量曲线 PRESSURE DROP VS. FLOW
32cSt oil @ 40° C

